



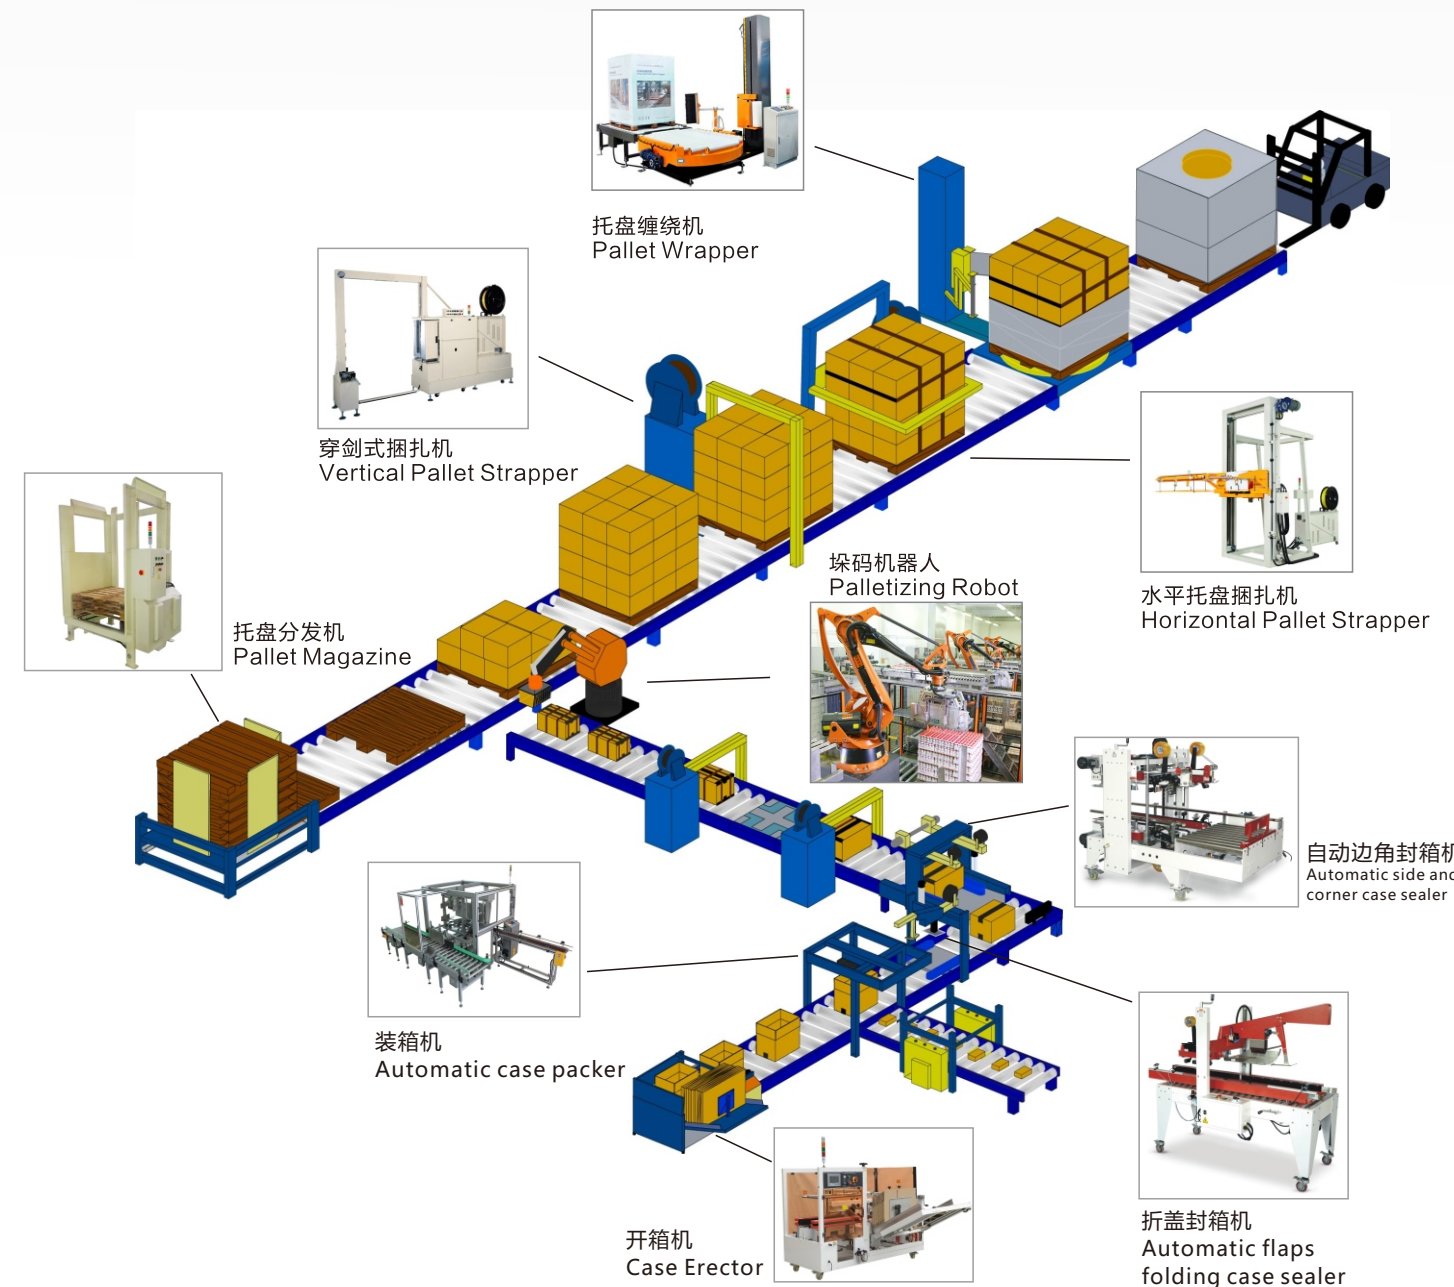

## HENOPAC® 自动化包装系统专业提供商

亨诺智能 Automated packaging system manufacturer

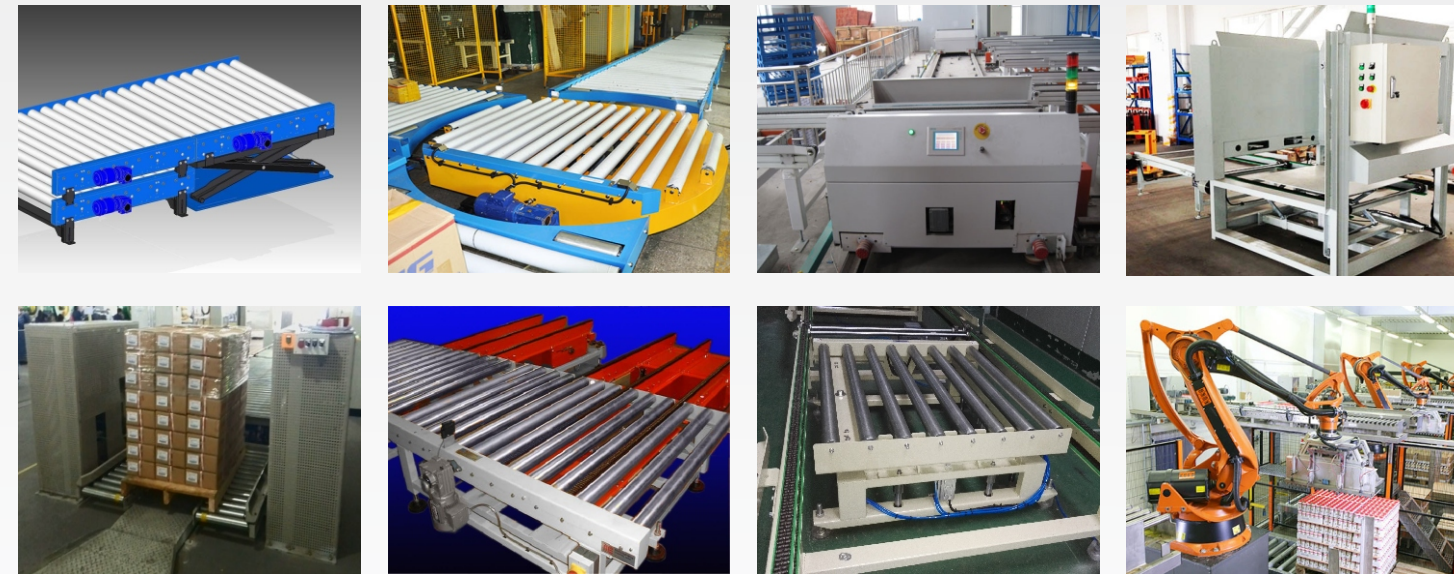

### G1P 预拉压顶缠绕机

Semi auto pallet wrapper with top press arm


电压Power Voltage: 1 P AC 220/110V 50/60 Hz  
转盘直径Turntable Dia:  $\Phi$  1500mm (optional  $\Phi$  1650/ $\Phi$  1800/ $\Phi$  2000/ $\Phi$  2200)  
转盘速度Speed turntable: 15 RPM max adjustable 转台转速变频可调  
转盘承重Loading Capacity:  $\Phi$  1500 mm : 1500 kg;  $\geq \Phi$  1650 mm : 2000 kg ;  
转盘高度turntable height: 80mm  
缠绕高度Wrapping height: H2100mm (optional 2400/2600/3000/3200/3400)  
有效压顶行程top press range: 1500mm-2100mm  
膜架类型film carriage type: 预拉, 拉伸比powered pre-stretch ratio 250%  
膜Film: LLDPE film, width  $\leq$  500mm, out diameter  $\leq$  280mm  
选项optional: ①.ramp ② extra position control box ③.electromagnetic brake  
噪音Noise:  $\leq$  75DB  
工作气压Air pressure: 0.4-0.7Mpa  
气缸行程cylinder range: 800mm  
环境Surroundings: Humidity  $\leq$  98%, temperature -10°C~40°C  
润滑材料Lubricate material: Common lubricating grease



### G5 自动遥控覆顶缠绕机

Automatic remote controlled pallet wrapper with Top Sheet Dispenser

电压Power Voltage: 3 PH AC 380V 50/60 Hz  
转盘直径Turntable Dia:  $\Phi$  1650mm (optional  $\Phi$  1800)  
转盘速度Speed turntable: 15 RPM max adjustable 转台转速变频可调  
转盘承重Loading Capacity:  $\geq \Phi$  1650 mm : 2000 kg ;  
转盘高度turntable height: 136mm  
缠绕高度Wrapping height: H2100mm (optional 2400/2600/3000)  
膜架类型film carriage type: 预拉, 拉伸比powered pre-stretch ratio 250%  
顶部覆膜机构升降速度: top dispensing unit lifting speed: 3m/min  
顶部覆膜机构拉膜速度: top sheet pulling speed: 12m/min  
顶部覆膜尺寸top sheet size: width 1700mm, 长度可调Length adjustable  
膜Film: LLDPE film, width  $\leq$  500mm, out diameter  $\leq$  280mm  
自动上断膜, 拂膜: automatic clamp, cut & weld  
选项optional: ① ramp ② extra position control box ③.electromagnetic brake  
噪音Noise:  $\leq$  75DB  
工作气压Air pressure: 0.4-0.7Mpa  
气缸行程cylinder range: 800mm  
环境Surroundings: Humidity  $\leq$  98%, temperature -10°C~40°C  
润滑材料Lubricate material: Common lubricating grease

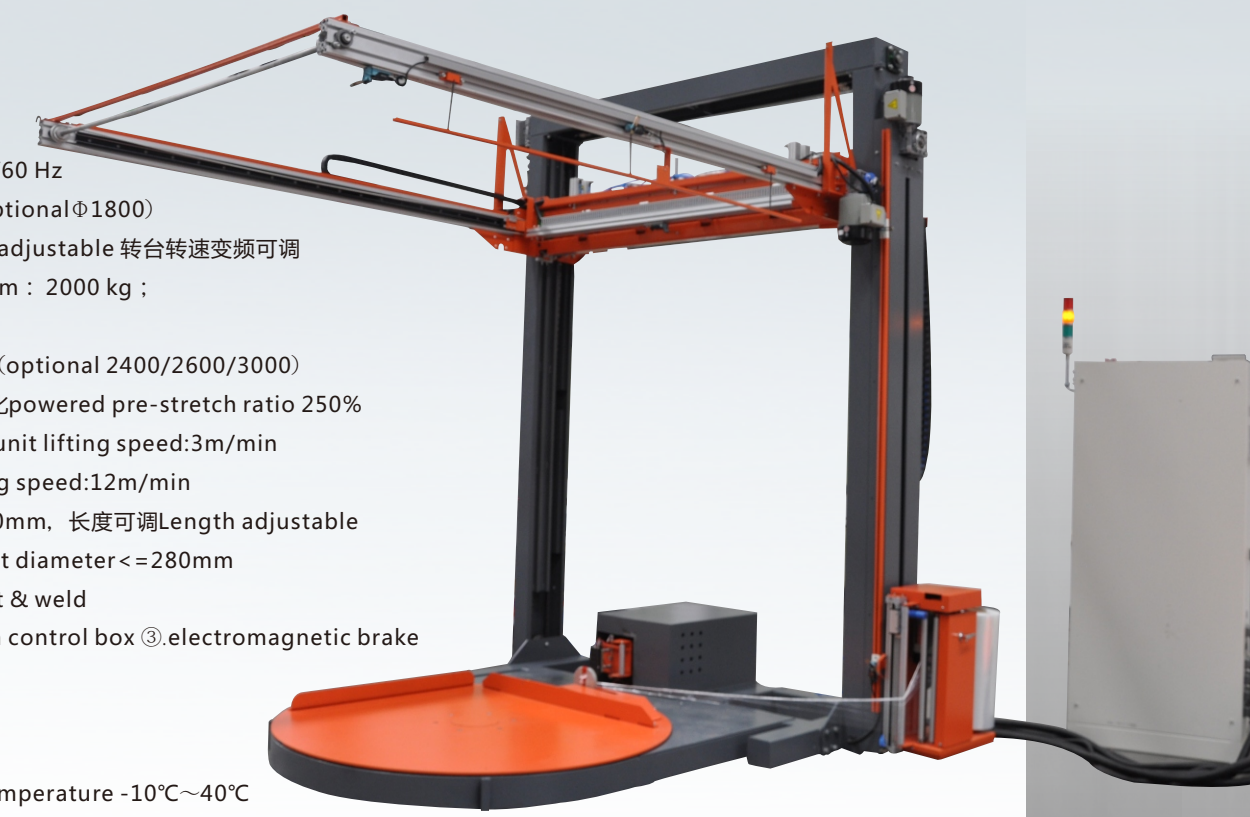

### G1 预拉半自动缠绕机

Semi automatic pallet wrapper with pre-stretch


电压Power Voltage: 1 P AC 220/110V 50/60 Hz  
转盘直径Turntable Dia:  $\Phi$  1500mm (optional  $\Phi$  1650/ $\Phi$  1800/ $\Phi$  2000/ $\Phi$  2200)  
转盘速度Speed turntable: 15 RPM max adjustable 转台转速变频可调  
转盘承重Loading Capacity:  $\Phi$  1500 mm : 1500 kg;  $\geq \Phi$  1650 mm : 2000 kg ;  
转盘高度turntable height: 80mm  
缠绕高度Wrapping height: H2100mm (optional 2400/2600/3000/3200/3400)  
膜架类型film carriage type: 预拉, 拉伸比powered pre-stretch ratio 250%  
膜Film: LLDPE film, width  $\leq$  500mm, out diameter  $\leq$  280mm  
选项optional: ①.ramp ② extra position control box ③.electromagnetic brake  
噪音Noise:  $\leq$  75DB  
环境Surroundings: Humidity  $\leq$  98%, temperature -10°C~40°C  
润滑材料Lubricate material: Common lubricating grease



### G3 自动遥控缠绕机

Automatic remote controlled pallet wrapper

电压Power Voltage: 1 P AC 220/110V 50/60 Hz  
转盘直径Turntable Dia:  $\Phi$  1650mm (optional  $\Phi$  1800)  
转盘速度Speed turntable: 15 RPM max adjustable 转台转速变频可调  
转盘承重Loading Capacity:  $\geq \Phi$  1650 mm : 2000 kg ;  
转盘高度turntable height: 87mm  
缠绕高度Wrapping height: H2100mm (optional 2400/2600/3000)  
膜架类型film carriage type: 预拉, 拉伸比powered pre-stretch ratio 250%  
膜Film: LLDPE film, width  $\leq$  500mm, out diameter  $\leq$  280mm  
自动上断膜, 拂膜: automatic clamp, cut & weld  
选项optional: ① ramp ② extra position control box ③.electromagnetic brake  
噪音Noise:  $\leq$  75DB  
工作气压Air pressure: 0.4-0.7Mpa  
气缸行程Cylinder range: 800mm  
环境Surroundings: Humidity  $\leq$  98%, temperature -10°C~40°C  
润滑材料Lubricate material: Common lubricating grease

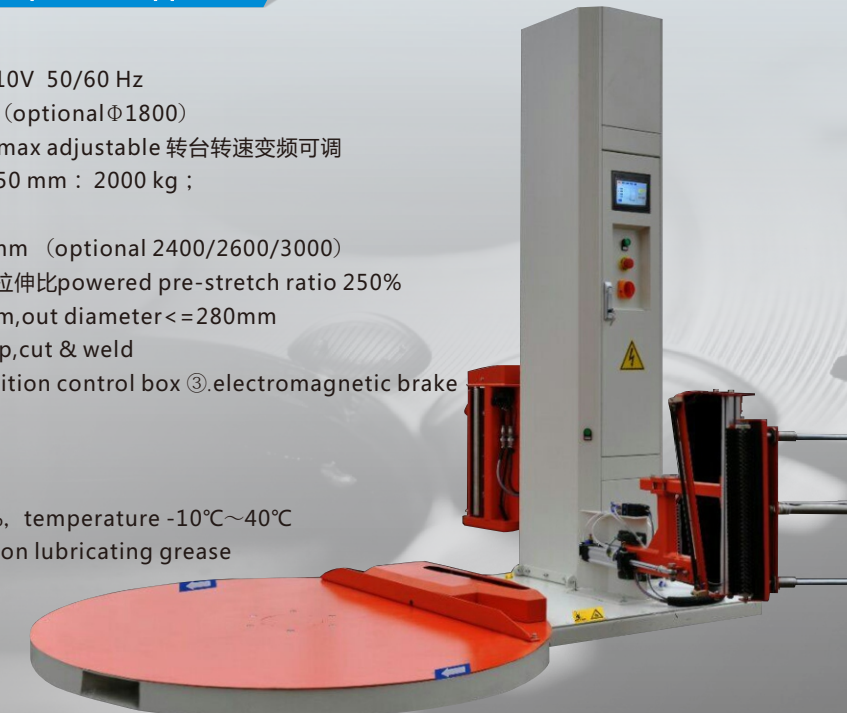

## HENOPAC® 亨诺智能